

Quad Bundle, A08545



Dual Bundle, A08550.72

Dual and Quad Bundles

Flexible bundles give the user versatility when routing and positioning the light

Features

- Tight bending radius for easy routing.
- A variety of standard sizes in dual and quad configurations.
 (See chart below for dual and quad bundle part numbers and specifications.)
- Multi-leg bundles are illuminated with one light source.
- The standard output ferrules accept spot lenses with or without polarizing caps. (See Accessories section of the product catalog for more details.)
- Standard input accepts Dichroic color filters, diffusers and ColdVision Series light sources.
- Support products are available in the Support Apparatus section of the product catalog.
- Custom configurations are available. Lead time is required.

Dual and Quad Bundles								
Part No.	Active Input Fiber Diameter	Distal Ferrule Diameter	Tubing Diameter	Bundle Length				
Dual Bundles								
A08530	.30" (8)	.393"(10)	.40" (10)	40"(1016)				
A08540	.36" (9)	.393" (10)	.47" (12)	40"(1016)				
A08550	.43" (11)	.393" (10)	.47" (12)	40"(1016)				
A08550.72	.43" (11)	.393" (10)	.47" (12)	72" (1829)				
Quad Bundles								
A08545	.50" (13)	.393" (10)	.47" (12)	40" (1016)				





Dual and Quad Bundles

Product improvements may result in specification or feature changes without notice.

Ringlight Input: Black Anodized Aluminum **Bundle Sheathing:** PVC Covered Metal Tubing

Warning: This product is manufactured with glass fiber. Not for use in cable/hose carrier. Call SCHOTT to discuss moving cable/hose carrier applications.

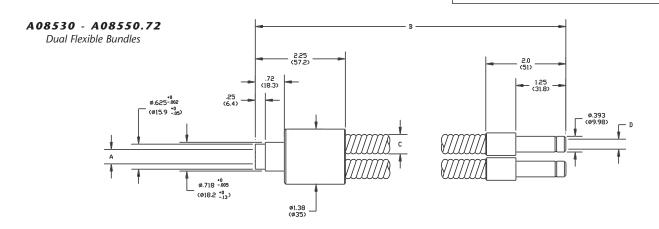

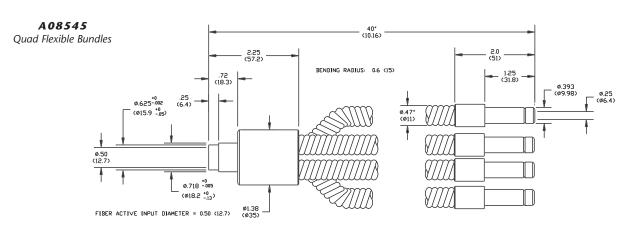

Dimensions in () are in mm

Matrix for A08530 - A08550.72 Dual Bundles							
Part No.	A	В	c	Bend Radius	D		
A08530	.30" (8)	40" (1016)	.40" (10)	.5" (13)	.21" (5.3)		
A08540	.36" (9)	40" (1016)	.47" (12)	.6" (15)	.25" (6.4)		
A08550	.43" (11)	40" (1016)	.47" (12)	.6" (15)	.30" (7.6)		
A08550.72	.43" (11)	72" (1829)	.47" (12)	.6" (15)	.30" (7.6)		

Lighting and Imaging SCHOTT North America, Inc.

122 Charlton Street Southbridge, MA 01550 USA

Phone: +1508/765-9744 Fax: +1508/764-6273

E-mail: lightingimaging@us.schott.com www.us.schott.com/lightingimaging

